

QESM052

SMD 5.0x3.2 Crystal – Ceramic SMD 2 pads packaged
Specification (Rev-B)

▣ Electrical Characteristics	P01
▣ ESR vs. frequency range and Mode of vibration	P01
▣ Mechanical Characteristics	P01
▣ Ordering Information	P02
▣ Suggested Reflow Soldering profile	P02
▣ Tape Drawing	P03
▣ Reel Drawing	P03

QESM052

SMD 5.0x3.2 Crystal – Ceramic SMD 2 pads packaged
Specification (rev-B)

November 06th, 2013

Electrical Characteristics


Electrical Parameters	Unit	Minimum	Typical	Maximum	Test conditions
Frequency range	MHz	8		80	
Frequency Tolerance (at 25°C)	± ppm	30	50	100	Refer to Ordering Information
Temperature Stability	± ppm	30	50	100	Refer to Ordering Information
Operating Temperature Range	°C		-20/+70	-40/+85	Refer to Ordering Information
Storage temperature range	°C	-55		+125	
Shunt capacitance C ₀	pF			7.0	
Load capacitance	pF	8pF ~ 30pF or series			Refer to Ordering Information
Drive level	µW	10	100	300	
Aging (First Year)	± ppm			5	Ref at 25°C
Insulator resistance	MΩ	500			At 100V _{DC}

Customized specification upon request

ESR vs. frequency range and Mode of vibration

Frequency range (MHz)	Mode of vibration	Max ESR (Ω)	Frequency range (MHz)	Mode of vibration	Max ESR (Ω)
8.000 to 8.999	Fund. / AT	140	20.000 to 29.999	Fund. / AT	70
9.000 to 9.999	Fund. / AT	120	30.000 to 47.999	Fund. / AT	50
10.000 to 19.999	Fund. / AT	80	48.000 to 80.000	3 rd OT / AT	70

Mechanical Characteristics

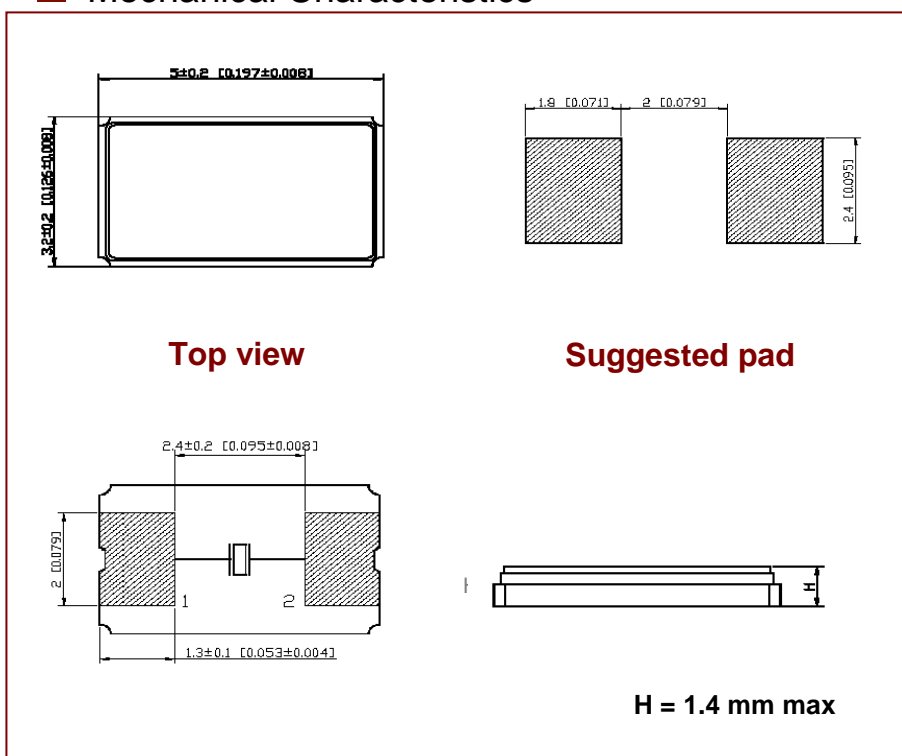

Marking for QESM052

Line 1	Rakon code (6 digits)
Line 2	T + date code (4 digits)

Mechanical conditions

Vibration	10g, 10Hz to 2KHz according to standard CEI 68-2-63
Shocks	100g, 6ms according to standard CEI 68-2-27

Note 1 : QESM052 is fully RoHS compliant.

QESM052


SMD 5.0x3.2 Crystal – Ceramic SMD 2 pads packaged
Specification (rev-B)

November 06th, 2013

Ordering Information

Part numbering system						
QESM052	1	30	HQ	30	18	12.000MHZ
Package type	Vibration mode	Frequency tolerance	Operating temperature range	Frequency stability	Load Capacitance	Nominal Frequency (MHz)
SMD Package QESM052 : SMD ceramic 5.0 x 3.2 2 pads	1=Fundamental 3=3 rd Overtone	30=±30ppm 50=±50ppm 100=±100ppm	D=-40°C F= -30°C H=-20°C J=-10°C L=0°C M=+50°C N=+55°C O=+60°C Q=+70°C T=+85°C	30=±30ppm 50=±50ppm 100=±100ppm	00=series 10=10pF 30=30pF Please, enter the value of load capacitance	Please enter the nominal frequency

Suggested Reflow Soldering Profile

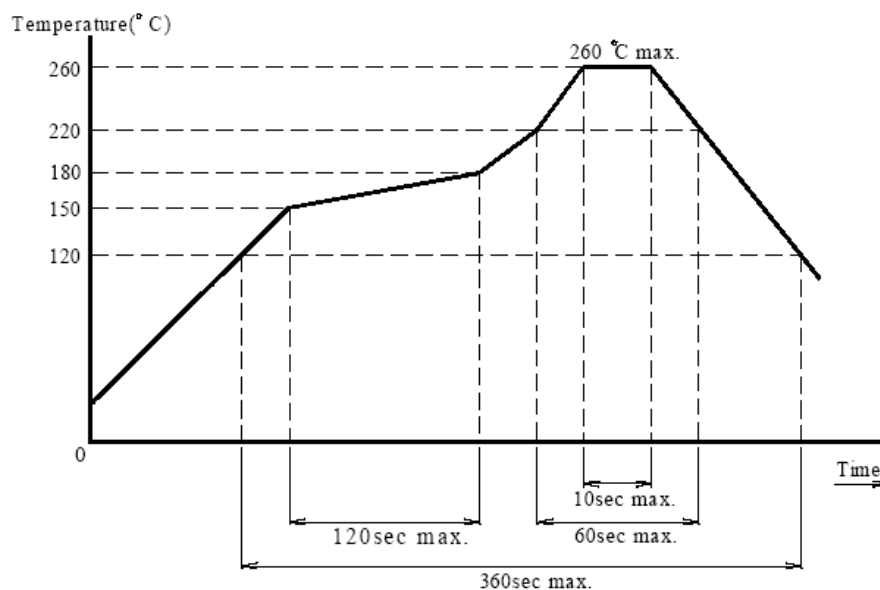


QESM052

SMD 5.0x3.2 Crystal – Ceramic SMD 2 pads packaged
Specification (rev-B)


November 06th, 2013

▣ Tape Drawing

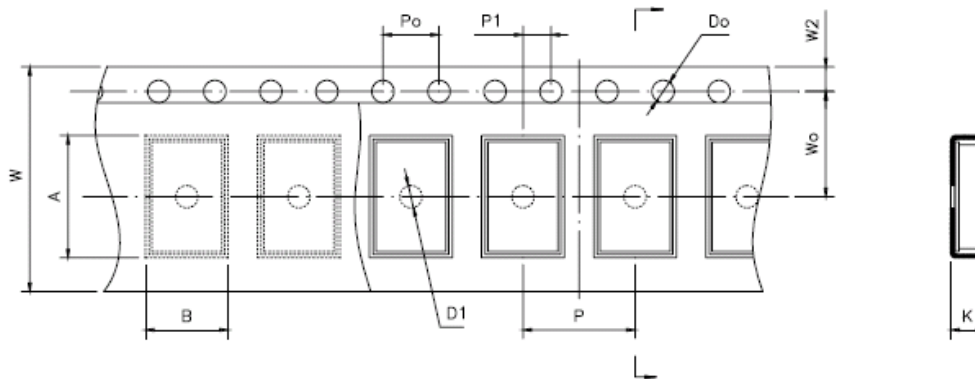

Item	Code	Dimension	Tolerance
Pitch of components	P	8.0	± 0.1
Pitch of sprocket hole	Po	4.0	± 0.1
Length from hole center to component center	P1	2.0	± 0.1
Width of carrier tape	W	12.0	± 0.3
Width of adhesive tape	W0	5.5	± 0.1
Height of component hole	A	5.5	± 0.1
Width of component hole	B	4.7	± 0.1
Gap of hold down tape and carrier tape	W2	1.75	± 0.1
Diameter of sprocket hole	Do	Ø 1.5	± 0.05
Diameter of feed hole	D1	Ø 1.5	± 0.25
Total of tape thickness	K	1.5	± 0.1

▣ Reel Drawing

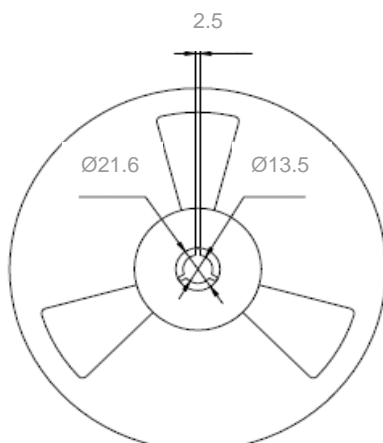

Multiple : 1Kpcs per Reel

Unit : mm

