

TMX IT07

RF SAW Filter – REMOTE CONTROL

Specification (Rev 5)

▣ Features	P01
▣ Package drawing & Pin out	P01
▣ Marking	P01
▣ Technical characteristics	P02
▣ Measurement circuit	P02
▣ Frequency characteristics	P03
▣ Maximum ratings	P04
▣ Recommended reflow soldering profile	P04
▣ Tape Specifications	P05
▣ Reel Specifications	P05
▣ Reliability tests.....	P06

TMX IT07

RF SAW Filter

Specification (Rev 5)


August 08th, 2017

Features

- ❑ RF SAW Filter for wireless applications such as Home appliances and Security systems
- ❑ 1220 MHz Center Frequency
- ❑ Passband : 40MHz
- ❑ No external matching is required
- ❑ Ceramic package for Surface Mounted Technology

Package drawing & Pin out

The product is in conformance with the European RoHs Regulation 2002/95.

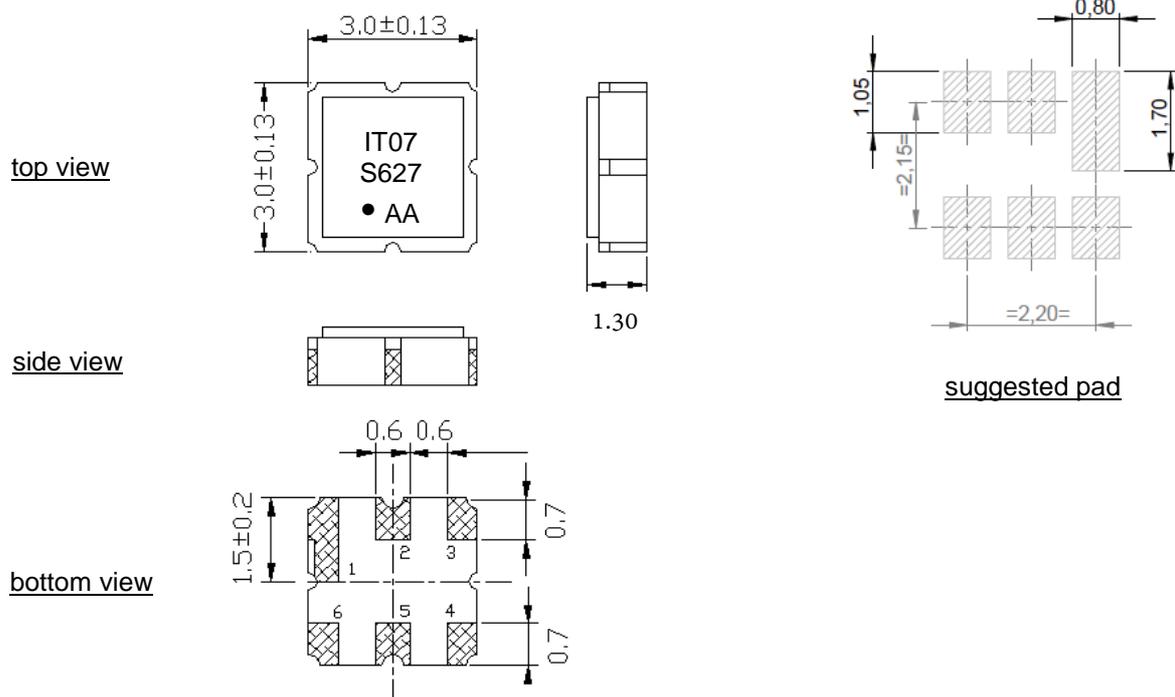

unit : mm

Pin configuration	
2	Input
5	Output
1,3,4,6	Case Ground

Marking		
Line 1	IT07	Temexpress designation
Line 2	S627	S is production Code / 6 is Year 2016 & 27 is Week 26
Line 3	AA	AA" is internal production batch code, it corresponds to the wafer

Marking is made by Laser

TMX IT07

RF SAW Filter

Specification (Rev 5)

August 08th, 2017

Technical characteristics

Reference Temperature: +25°C


Electrical Parameters	Unit	Minimum	Typical ⁽¹⁾	Maximum
Center Frequency fo	MHz	-	1220	-
PassBand Width	MHz	-	1200 ~ 1240	-
Insertion Loss in 1200MHz – 1240MHz	dB	-	2.5	2.7
Amplitude Ripple in 1200MHz – 1240MHz	dB	-	0.9	1.5
30dB Bandwidth	MHz	-	79	85
Rejection				
DC ~ 1160 MHz	dB	40	45	-
1160 ~ 1185 MHz	dB	20	25	-
1185 ~ 1195 MHz	dB	-	5	-
1245 ~ 1255 MHz	dB	-	5	-
1255 ~ 1300 MHz	dB	15	20	-
1300 ~ 1500 MHz	dB	40	45	-
1500 ~ 1732 MHz	dB	37	43	-
VSWR in 1200MHz – 1240MHz		-	1.5	2.0
Source Impedance (Single ended)	Ohms	-	50 ⁽²⁾	-
Load Impedance (Single ended)	Ohms	-	50 ⁽²⁾	-
Package type & size				
Length x Width	mm		3.0 x 3.0	
Height	mm		1.3	
Pin Out				
Input	2	Output	5	
Case Ground	1, 3, 4, 6	To be grounded	1, 3, 4, 6	

Note :

- (1) Typical values are nominal performances at room temperature
- (2) No external matching is required

Measurement circuit

50 Ω / 50 Ω Configuration

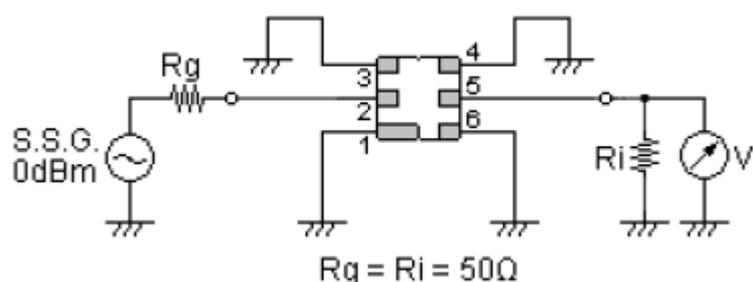

TMX IT07


RF SAW Filter

Specification (Rev 5)

August 08th, 2017

Frequency characteristics

TYPICAL S21 RESPONSE

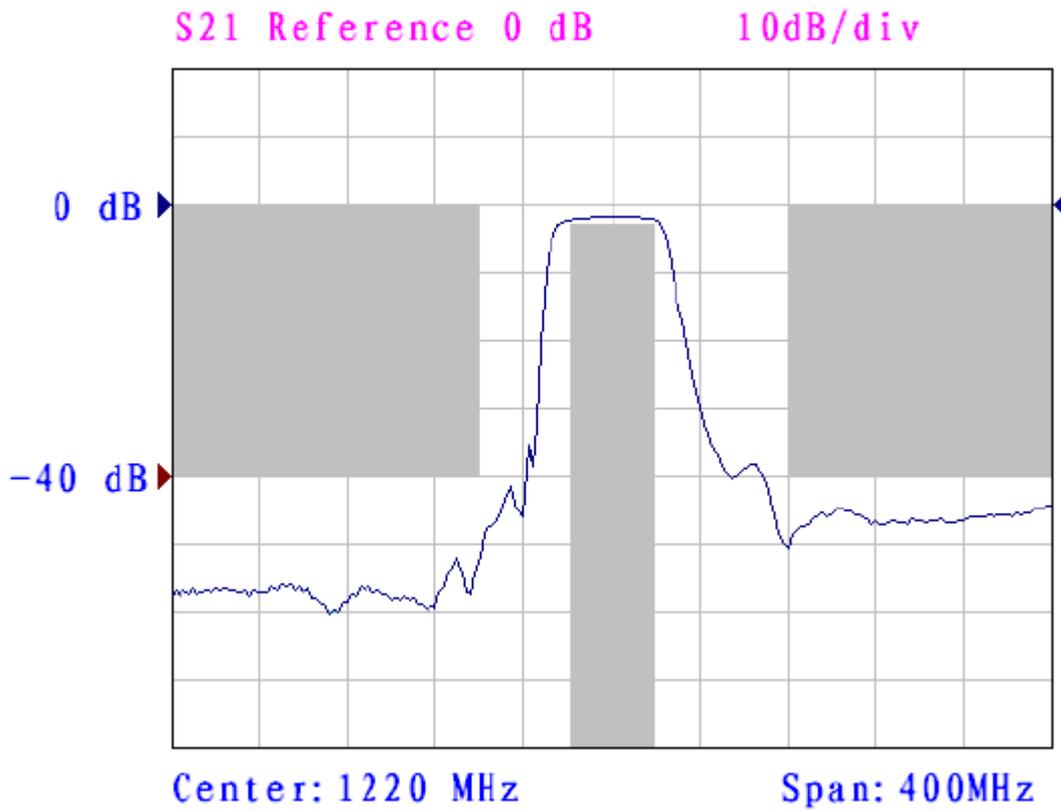

TMX IT07

RF SAW Filter


Specification (Rev 5)

August 08th, 2017

Maximum ratings

Storage Temperature Range	°C	[-40°C ; +85°C]
Operating Temperature	°C	[-40°C ; +85°C]
DC Permissive Voltage	V	12V max
Maximum Input Power Handling	dBm	15

Recommended reflow soldering profile

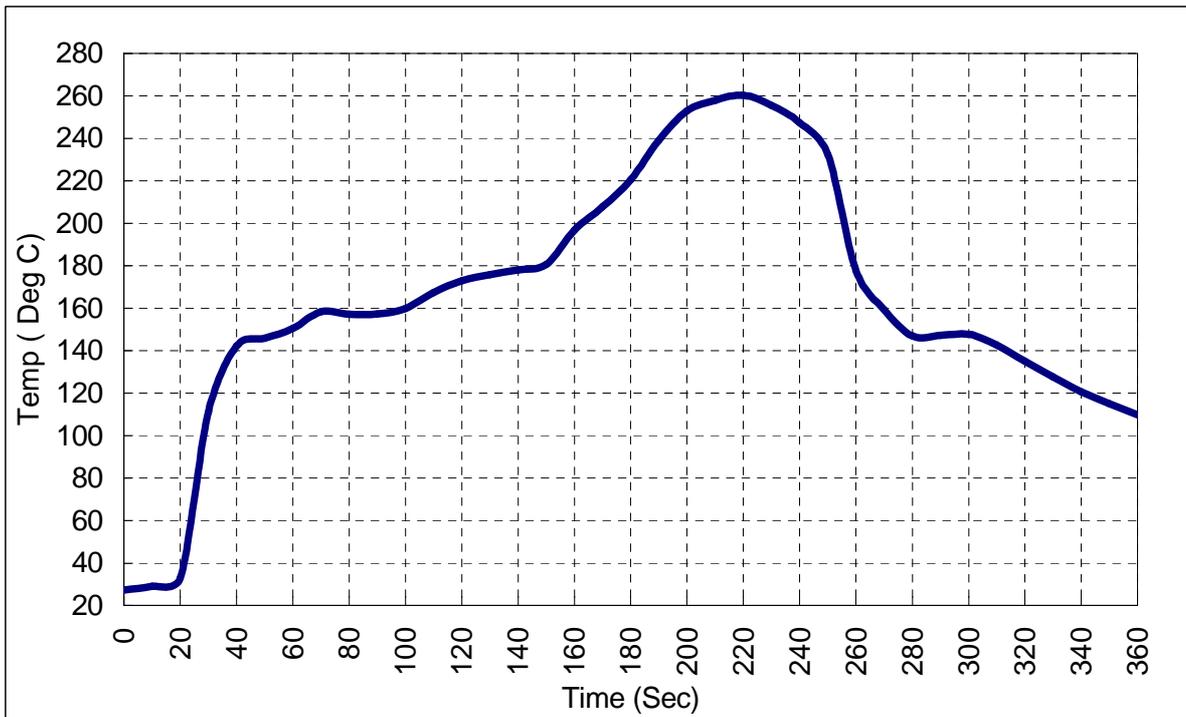

The components shall remain within the electrical specifications after it soldered on the 1mm thickness PCB board and dipped in the solder at 260 ± 5 degC during 10 ± 1 seconds.

The components shall remain within the electrical specifications after it soldered by electric iron, solder at 350 ± 10 degC during 3~4 seconds. Recovery time: $2h \pm 0.5h$.

Ultrasonic cleaning may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.

Only leads of component may be soldered. Please avoid soldering another part of component.


TMX IT07

RF SAW Filter

Specification (Rev 5)

August 08th, 2017

Tape Specifications


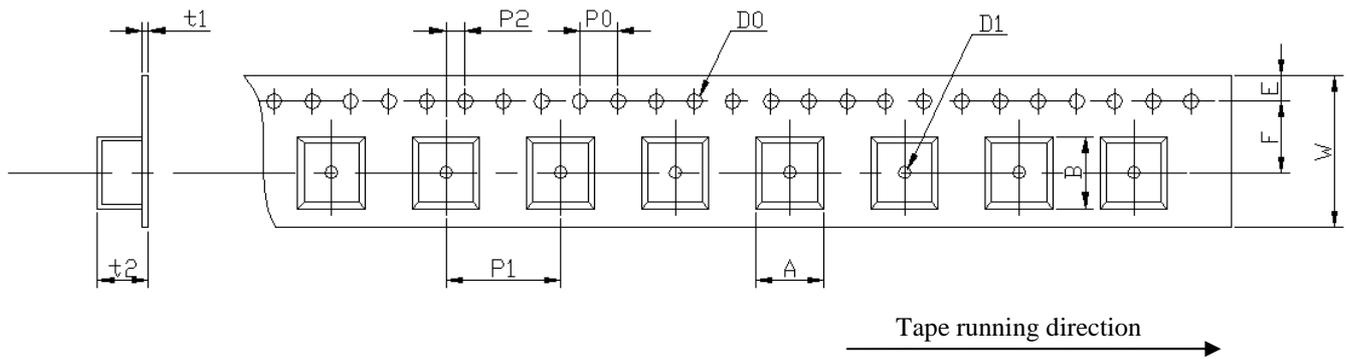


W	F	E	P0	P1	P2	D0	D1	t1	t2	A	B
12 ±0.3	5.5 ±0.3	1.75 ±0.1	4.0 ±0.2	4.0 ±0.1	2.0 ±0.2	∅1.5 ±0.1	∅1.5 ±0.25	0.31 max	1.7 max	3.3 max	3.3 max

unit : mm

Reel Specifications

TMX IT07 is packaged in T&R by 3Kpcs/reel

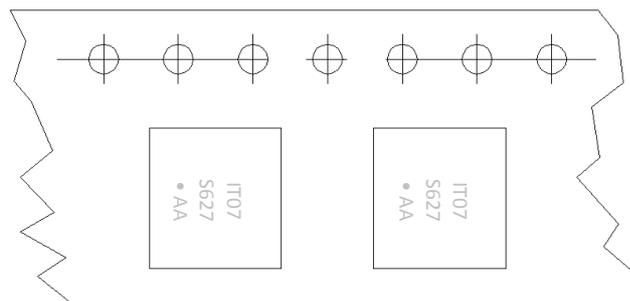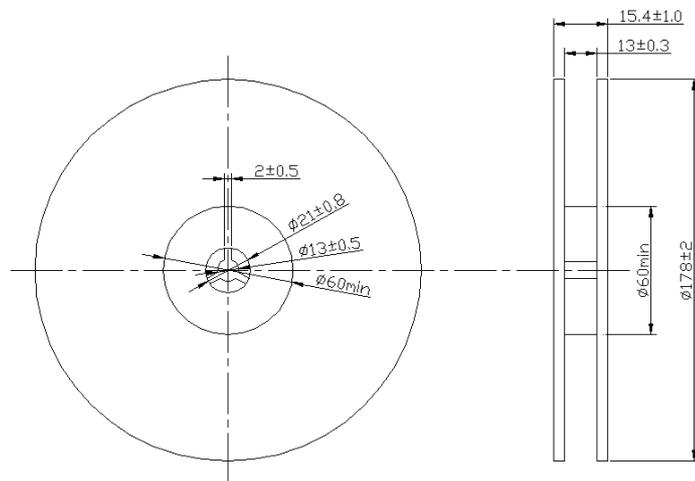

Tape running direction

TMX IT07

RF SAW Filter

Specification (Rev 5)

August 08th, 2017

Reliability Tests

1. **Thermal Shock:**

The components shall remain within the electrical specifications after being kept at the condition of heat cycle conditions: TA=-40°C ±3°C, TB=85°C ±2°C, t1=t2=30min, switch time ≤3min & cycle time: 100 times, recovery time: 2h±0.5h.

2. **The Temperature Storage:**

High Temperature Storage: The components shall remain within the electrical specifications after being kept at the 85°C ±2°C for 500 hours, recovery time: 2h ±0.5h.

Low Temperature Storage: The components shall remain within the electrical specifications after being kept at the -40°C ±3°C for 500 hours, recovery time: 2h ±0.5h.

3. **Humidity test:**

The components shall remain within the electrical specifications after being kept at the condition of ambient temperature 60°C ±2°C, and 90~95% RH for 500 hours.

4. **Drop test:**

The components shall remain within the electrical specifications after random free drops 10 times from height of 1.0 meter onto concrete floor, and the specimens shall meet the electrical specifications.

5. **Vibration Fatigue:**

The components shall remain within the electrical specifications after loaded vibration at 10~55Hz, amplitude 1.5mm, X, Y, Z, direction, during 2 hours.

6. **Mechanical Shock:**

The components shall remain within the electrical specifications after 1000 shocks, acceleration 392 m/s², duration 6ms.

Note: As a result of the particularity of inner structure of SAW products, the components can easily be breakdown by electrostatic shock; so it's mandatory to pay attention to ESD protect during the tests.