

TMX W365

SAW Bandpass Filter – WCDMA Rx – RF
Specification (Rev 1)

▣ Features.....	P01
▣ Package Drawing & Pin out.....	P01
▣ Technical Characteristics	P02
▣ Matching Network.....	P02
▣ Nominal Response.....	P03
▣ Maximum Ratings.....	P04
▣ Marking & Packaging	P04

TMX W365

SAW Bandpass Filter – WCDMA Rx – RF

Specification (Rev 1)

October 25th, 2005

Technical Characteristics


Reference Temperature : +25°C

Electrical Parameters	Unit	Minimum	Typical ⁽¹⁾	Maximum
Source Impedance (single ended)	Ω	-	50	-
Load Impedance (balanced drive)	Ω	-	200 ⁽²⁾	-
Center Frequency fo	MHz	-	2140	-
Bandwidth at -3 dB	MHz	60	-	-
Absolute attenuation				
180 MHz to 200 MHz	dB	60	85	-
200 MHz to 1000 MHz	dB	50	58	-
1000 MHz to 1880 MHz	dB	29	36	-
1880 MHz to 1980 MHz	dB	26	32	-
1980 MHz to 2050 MHz	dB	22	28	-
2050 MHz to 2255 MHz	dB	13	20	-
2255 MHz to 2300 MHz	dB	19	25	-
2300 MHz to 2490 MHz	dB	22	26	-
2490 MHz to 2550 MHz	dB	30	39	-
2550 MHz to 3200 MHz	dB	32	36	-
3200 MHz to 6000 MHz	dB	38	49	-
Insertion Loss within 2110 MHz ~ 2170 MHz	dB	-	3.1	4.1
Symmetry in band (referenced to the matched operating condition)				
Output amplitude balance (S31 / S21) within 2110 MHz ~ 2170 MHz	dB	-2.9	0	1.4
Output phase balance (∠(S31) - ∠(S21)+180°) within 2110 MHz ~ 2170 MHz	degree	-10	0	15
Input VSWR within 2110 MHz ~ 2170 MHz		-	1.7	2.4
Output VSWR within 2110 MHz ~ 2170 MHz		-	1.8	2.4
Ripple within 2110 MHz ~ 2170 MHz	dB	-	0.9	1.8

Notes :

- (1) Typical values are nominal performances at room temperature.
- (2) External matching network is required.
- (3) The amplitude variation is defined as the maximum level – minimum level over the given bandwidth.

Matching Network

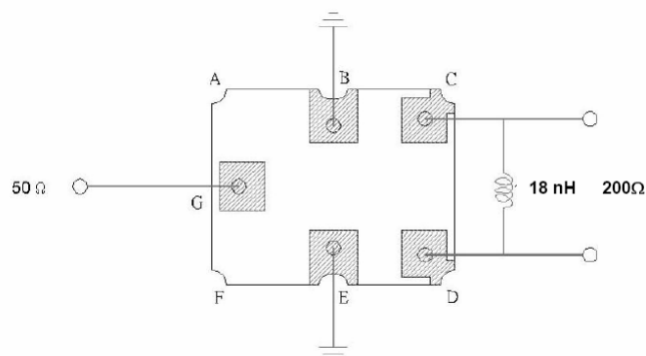

TMX W365


SAW Bandpass Filter – WCDMA Rx – RF

Specification (Rev 1)


October 25th, 2005

Nominal Frequency Response (Measurements)

Frequency Response

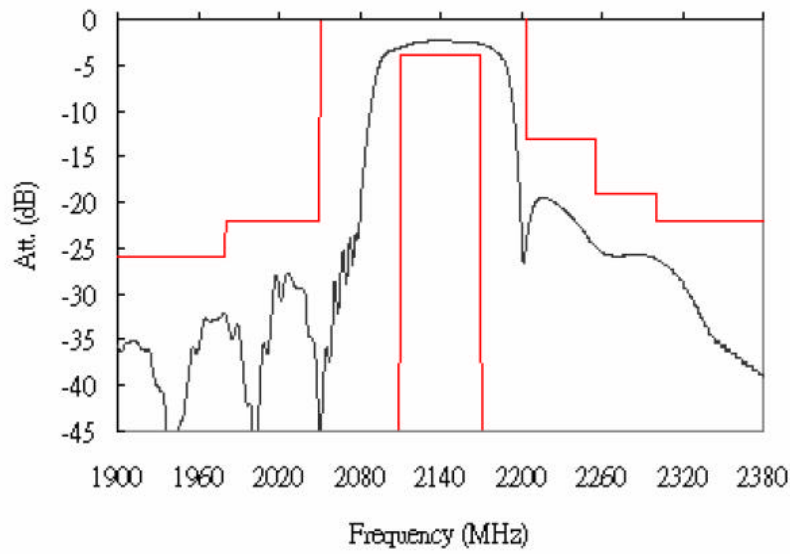

Frequency Response

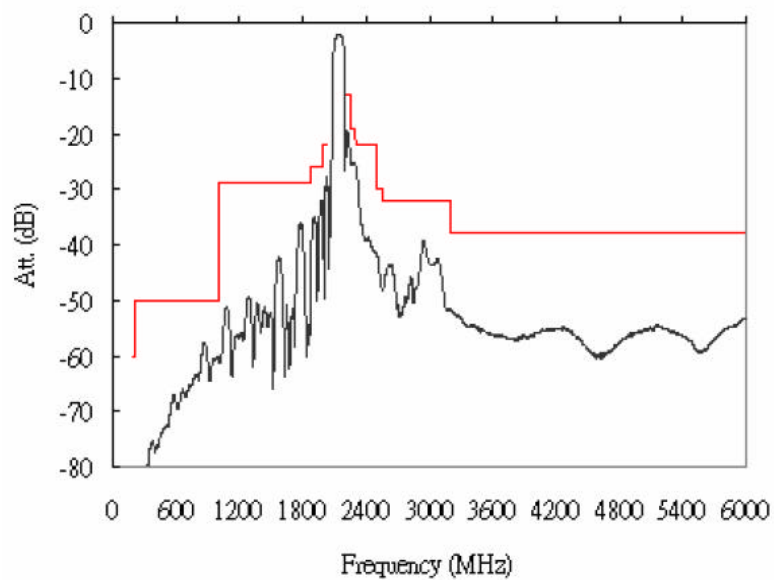

TMX W365

SAW Bandpass Filter – WCDMA Rx – RF


Specification (Rev 1)

October 25th, 2005

Maximum Ratings

Operating Temperature Range	°C	[-25°C ; +85°C]
Storage Temperature Range	°C	[-40°C ; +85°C]

Marking



Line 1: "P C" with P for the code product identification and C for the partner identifier

Line 2: "Y W" with Y for the last digit of the year and W for the week code (A to Z for the week 1 to 26 and a to z for the week 27 to 52).

Packaging

1. Temex label
2. ESD Prevention label
3. Pb free label (if applicable)

