

TMX W330

Low Loss Bandpass SAW Filter – REMOTE CONTROL - RF
Specification (Rev 5)

▣ Features	P01
▣ Package drawing & Pin out	P01
▣ Marking	P01
▣ Technical characteristics	P02
▣ Measurement circuit	P02
▣ Frequency characteristics	P03
▣ Maximum ratings	P04
▣ Recommended reflow soldering profile	P04
▣ Tape Specifications	P05
▣ Reel Specifications	P05
▣ Reliability tests.....	P06

TMX W330

Low Loss SAW Bandpass Filter – REMOTE CONTROL s

Specification (Rev 5)


December 22nd, 2020

Features

- ❑ RF SAW Filter for wireless applications such as Smart metering, Home appliances and Security systems
- ❑ 869 MHz Center Frequency
- ❑ Ceramic package for Surface Mounted Technology
- ❑ Low Loss (typically 2.5dB) within PassBand Width 868MHz to 870MHz
- ❑ Good rejections specially near the GSM carrier at 912MHz (-60dB)
- ❑ Maximum pulse power : 27dBm
- ❑ Already used with main RF chipsets as Analog Devices, Infineon, Melexis, Semtech and Texas Instruments.

Package drawing & Pin out

The product is in conformance with the European RoHs Regulation 2015/863.

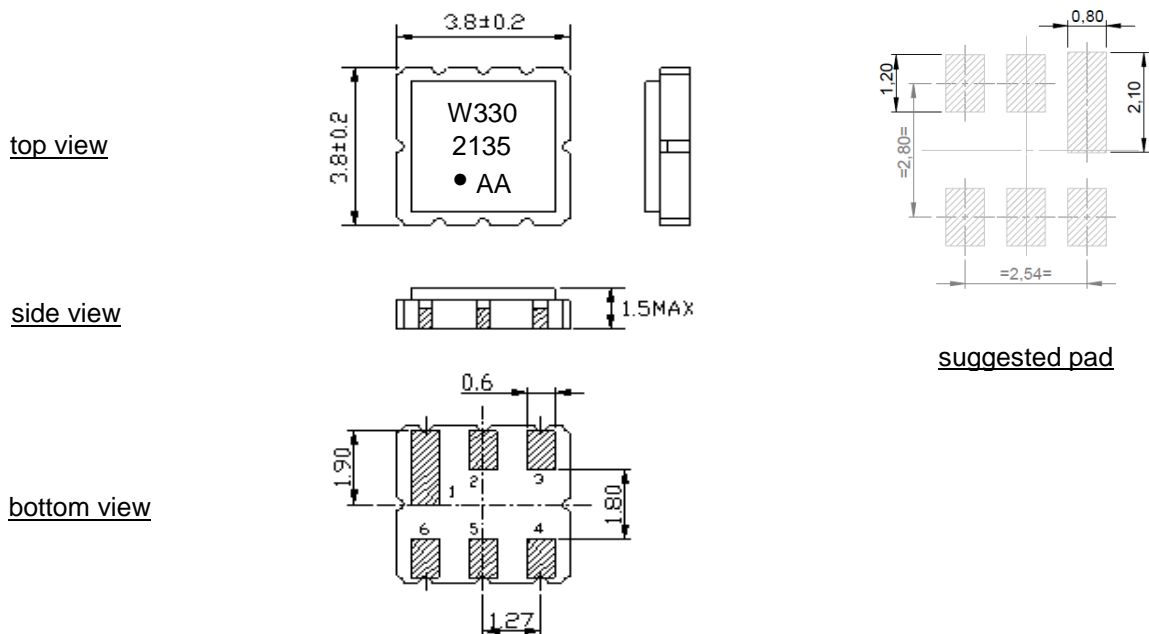

unit : mm

Pin configuration	
2	Input
5	Output
1,3,4,6	Ground

Marking		
Line 1	W330	Temexpress designation
Line 2	2135	Date Code / 21 is Year 2021 & 35 is Week 35
Line 3	AA	AA" is internal production batch code, it corresponds to the wafer

Marking is made by Laser

TMX W330

Low Loss SAW Bandpass Filter – REMOTE CONTROL Specification (Rev 5)

December 22nd, 2020

Technical characteristics

Reference Temperature: +25°C


Electrical Parameters	Unit	Minimum	Typical ⁽¹⁾	Maximum
Center Frequency fo	MHz	-	869	-
PassBand Width	MHz	-	868 ~ 870	-
Insertion Loss in 868MHz – 870MHz	dB	-	2.5	3.4
Amplitude Ripple in 868MHz – 870MHz	dB	-	0.3	1.5
Absolute Attenuation				
D.C ~ 300 MHz	dB	45	50	-
300 ~ 856.5 MHz	dB	40	45	-
856.5 ~ 859.5 MHz	dB	15	20	-
878 ~ 883.5 MHz	dB	15	20	-
883.5 ~ 1500 MHz	dB	48	55	-
1500 ~ 2600 MHz	dB	40	45	-
Temperature Coefficient of Frequency	ppm/K	-	-31.0	-
Source Impedance (Single ended)	Ohms	-	50 ⁽²⁾	-
Load Impedance (Single ended)	Ohms	-	50 ⁽²⁾	-
Package type & size				
Length x Width	mm		3.0 x 3.0	
Height	mm		1.3	1.5
Pin Out				
Input	2	Output	5	
Case Ground	1, 3, 4, 6	To be grounded	1, 3, 4, 6	

Note :

- (1) Typical values are nominal performances at room temperature
- (2) No external matching is required

Measurement circuit

50 Ω / 50 Ω Configuration

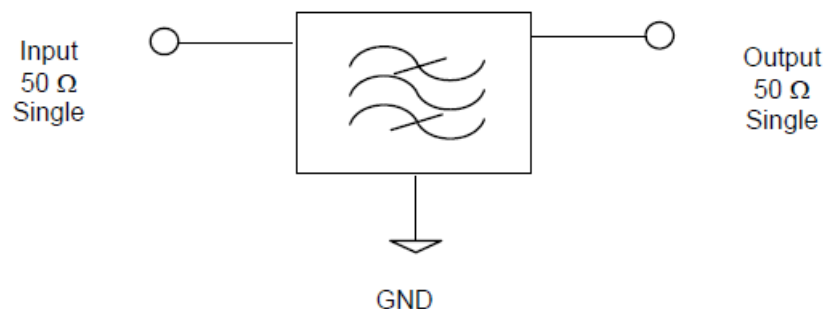

TMX W330

Low Loss SAW Bandpass Filter – REMOTE CONTROL

Specification (Rev 5)

December 22nd, 2020

Frequency characteristics


TYPICAL S21 RESPONSE

References

CENTER FREQUENCY = 0 MHz
 LOSS REFERENCE = 0 dB
 DELAY REFERENCE = 0 μs
 PHASE REFERENCE = 0 deg

Scales

SCALE_FREQUENCY = 10 MHz/div

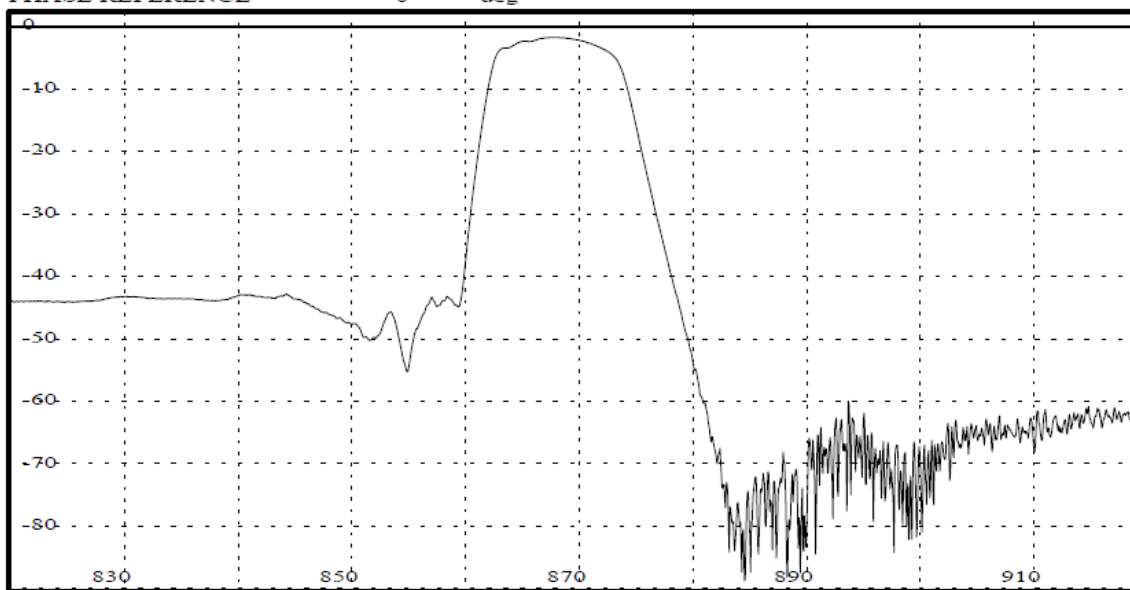


References

CENTER FREQUENCY = 0 MHz
 LOSS REFERENCE = 0 dB
 DELAY REFERENCE = 0 μs
 PHASE REFERENCE = 0 deg

Scales

SCALE_FREQUENCY = 1 MHz/div

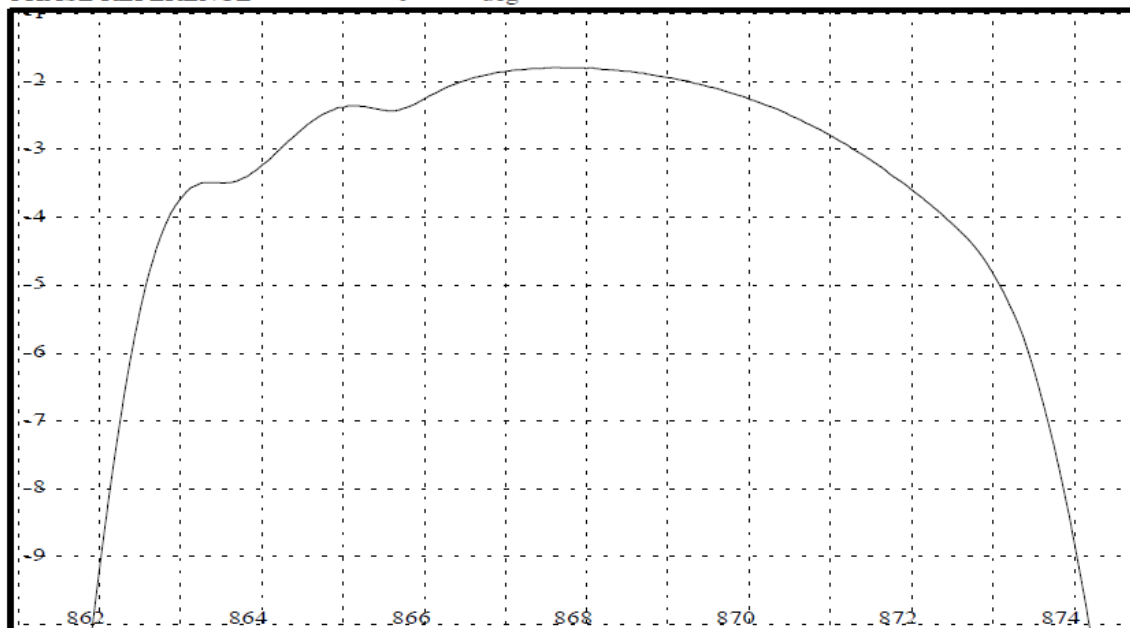

TMX W330

Low Loss SAW Bandpass Filter – REMOTE CONTROL


Specification (Rev 5)

December 22nd, 2020

Maximum ratings

Storage Temperature Range	°C	[-40°C ; +85°C]
Operating Temperature	°C	[-40°C ; +85°C]
DC Permissive Voltage	V	10V max
Maximum Pulse Input Power	dBm	27
Maximum Input Power Handling (at 50°C during 50 000 hours)	dBm	20

Recommended reflow soldering profile

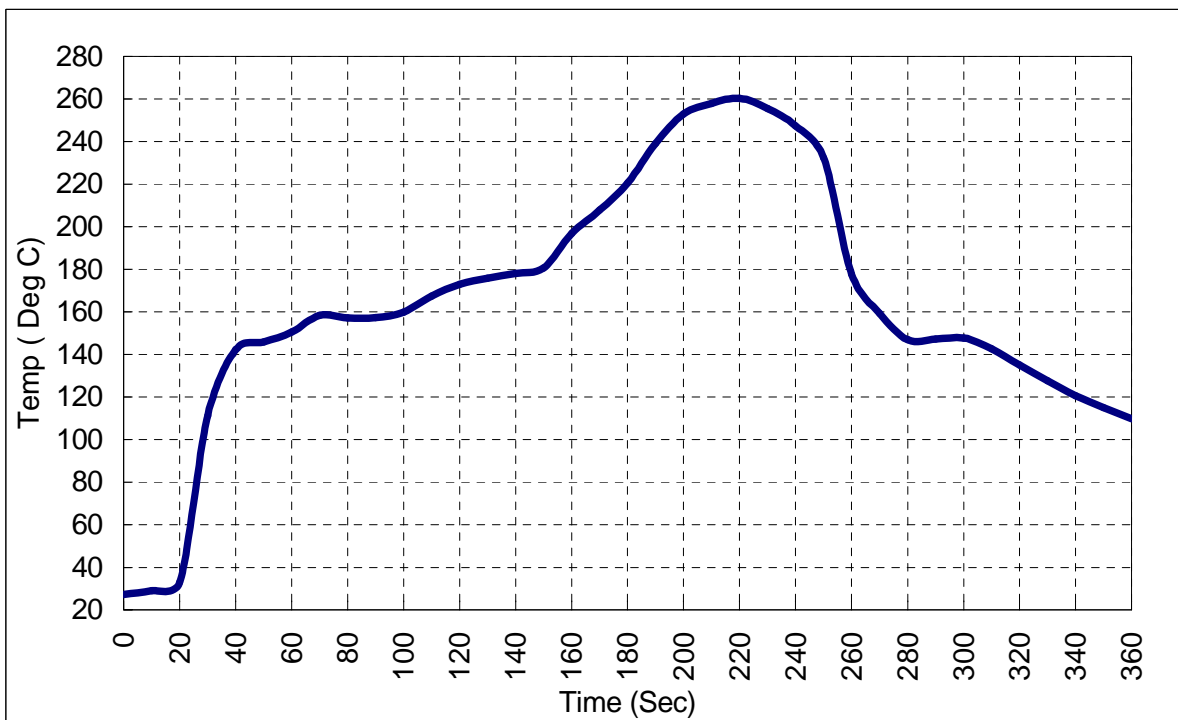

The components shall remain within the electrical specifications after it soldered on the 1mm thickness PCB board and dipped in the solder at 260 ± 5 degC during 10 ± 1 seconds.

The components shall remain within the electrical specifications after it soldered by electric iron, solder at 350 ± 10 degC during 3~4 seconds. Recovery time: $2h \pm 0.5h$.

Ultrasonic cleaning may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.

Only leads of component may be soldered. Please avoid soldering another part of component.


TMX W330

Low Loss SAW Bandpass Filter – REMOTE CONTROL

Specification (Rev 5)

December 22nd, 2020

Tape Specifications


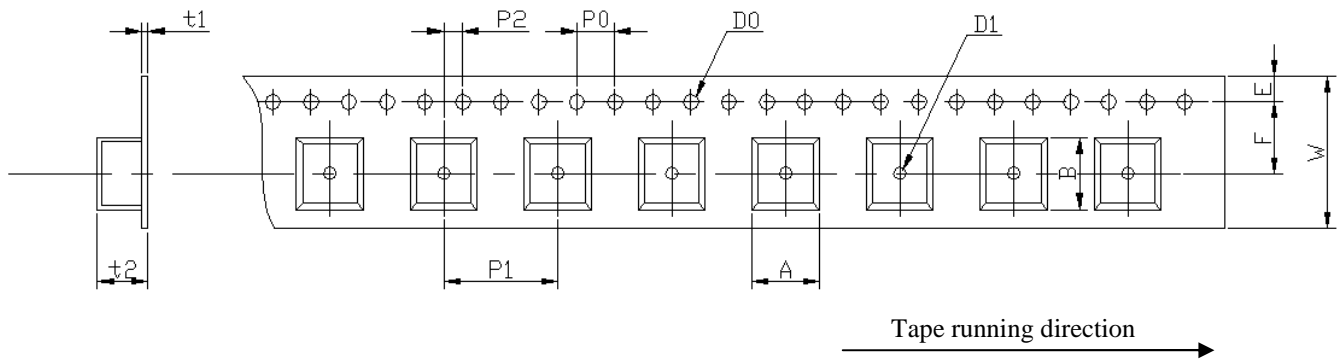


W	F	E	P0	P1	P2	D0	D1	t1	t2	A	B
12 ±0.3	5.5 ±0.1	1.75 ±0.1	4.0 ±0.2	8.0 ±0.1	2.0 ±0.2	∅1.5 ±0.1	∅1.5 ±0.25	0.31 max	1.95 max	4.1 max	4.1 max

unit : mm

Reel Specifications

TMX W330 is packaged in T&R by 1Kpcs/reel

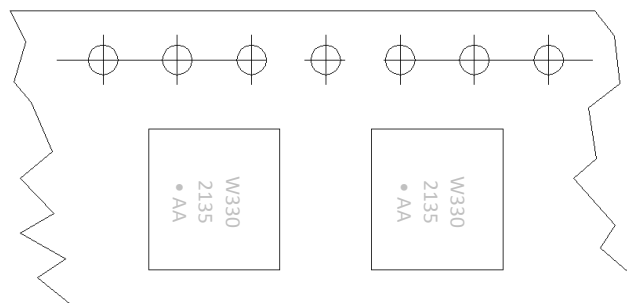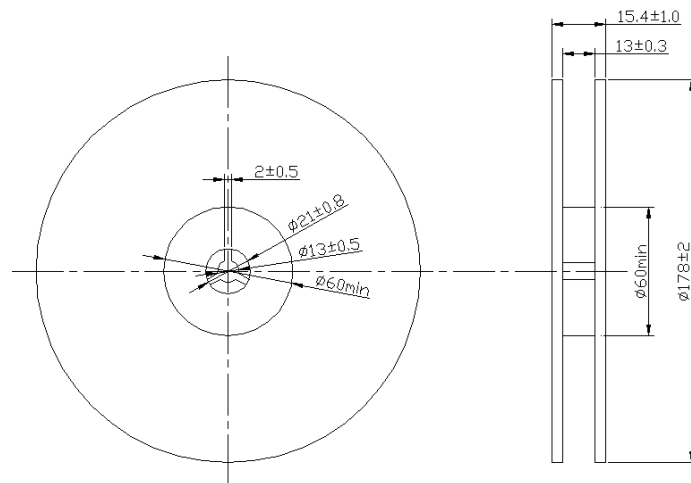

Tape running direction

TMX W330

Low Loss SAW Bandpass Filter – REMOTE CONTROL

Specification (Rev 5)

December 22nd, 2020

Reliability Tests

1. **Thermal Shock:**

The components shall remain within the electrical specifications after being kept at the condition of heat cycle conditions: TA=-40°C ±3°C, TB=85°C ±2°C, t1=t2=30min, switch time ≤3min & cycle time: 100 times, recovery time: 2h±0.5h.

2. **The Temperature Storage:**

High Temperature Storage: The components shall remain within the electrical specifications after being kept at the 85°C ±2°C for 500 hours, recovery time: 2h ±0.5h.

Low Temperature Storage: The components shall remain within the electrical specifications after being kept at the -40°C ±3°C for 500 hours, recovery time: 2h ±0.5h.

3. **Humidity test:**

The components shall remain within the electrical specifications after being kept at the condition of ambient temperature 60°C ±2°C, and 90~95% RH for 500 hours.

4. **Drop test:**

The components shall remain within the electrical specifications after random free drops 10 times from height of 1.0 meter onto concrete floor, and the specimens shall meet the electrical specifications.

5. **Vibration Fatigue:**

The components shall remain within the electrical specifications after loaded vibration at 10~55Hz, amplitude 1.5mm, X, Y, Z, direction, during 2 hours.

6. **Mechanical Shock:**

The components shall remain within the electrical specifications after 1000 shocks, acceleration 392 m/s², duration 6ms.

Note: As a result of the particularity of inner structure of SAW products, the components can easily be breakdown by electrostatic shock; so it's mandatory to pay attention to ESD protect during the tests.